

► Additional supplemental material is published online only. To view, please visit the journal online (http://dx. doi.org/10.1136/ejhpharm-2021-002747).

¹Department of Clinical Pharmacy, Zaans Medical Centre, Zaandam, The Netherlands ²Department of Clinical Pharmacy and Pharmacology, University Medical Centre Groningen, Groningen, The Netherlands ³Department of Clinical Pharmacy & Toxicology, Leiden University Medical Center, Leiden, The Netherlands ⁴Department of Clinical Pharmacy, Albert Schweitzer Ziekenhuis, Dordrecht, The Netherlands

Correspondence to

Frits A Boom, Zaans Medical Centre, 1502 DV Zaandam, The Netherlands; boom.f@ zaansmc.nl

Received 19 February 2021 Accepted 17 May 2021 Published Online First 7 July 2021

EAHP Statement 3: Production and Compounding.



http://dx.doi.org/10.1136/
 ejhpharm-2019-002178
 http://dx.doi.org/10.1136/
 ejhpharm-2019-002179

() Check for updates

© European Association of Hospital Pharmacists 2023. Re-use permitted under CC BY. Published by BMJ.

To cite: Boom FA, Le
Brun PPH, Ris JM, et al. Eur J Hosp Pharm
Eur J Hosp Pharm
2023; 30 :160–166.

160

Reducing the risk of non-sterility of aseptic handling in hospital pharmacies, part C: applying risk assessment and risk control in practice

Frits A Boom,^{1,2} Paul P H Le Brun,³ Judith M Ris,¹ Tjitske Veenbaas,⁴ Daan Touw²

ABSTRACT

Objectives To describe the application of the model described in part A and part B of this series of articles for risk assessment (RA) and risk control (RC) of non-sterility during aseptic handling. The model was applied in nine hospital pharmacies.

Methods The starting point was an audit of each hospital pharmacy. The determined risk reduction and remaining risks were entered into a risk assessment model. The corresponding risk prioritisation numbers (RPNs) for each source of risk were calculated and these values were summed up to a cumulative RPN. Subsequently, all hospital pharmacies started an improvement programme, using the risk assessment as input. Results of aseptic process simulation (APS) and microbiological monitoring (MM) were also collected. The participants were informed about their progress of risk reduction and results of APS and MM during the study period. At the end of the study (about 4 vears after the start), a final assessment was executed by using a checklist with risk reducing measures for each source of risk. Additional risk reduction and remaining risks were put in an RA and RC template and corresponding RPN values and a new cumulative RPN were determined.

Results At the start of the study differences in cumulative RPN values were relatively small (from 630 to 825). At the end they were relatively great (from 230 to 725), which illustrates a different sense of urgency for reducing the risk of non-sterility. Of all the risk reducing measures, a yearly audit of all operators had the greatest impact on reducing the risk of non-sterility. Except for glove prints, there was no correlation between process improvement (lower cumulative RPN) and results of microbiological controls.

Conclusion A systematic and science-based reduction of the risks of non-sterility can be done by using a checklist with risk reducing measures and an RA & RC template. Prospectively, the relevance of each risk reducing measure can be demonstrated by RPN calculations. Microbiological controls are an important part of the overall assurance of product quality. However, the results are less useful for assessing the risk of non-sterility.

INTRODUCTION

Aseptic handling is the procedure to enable sterile products to be made ready to administer using closed systems.¹ Because of the risk of medication errors and the chance of microbiological contamination during preparation, aseptic handling is recognised as a high-risk procedure.¹⁻³

In part A and part B of this series of articles we described a model for risk assessment (RA) and risk control (RC) of non-sterility during aseptic handling.^{4 5} Risk reducing measures, for each source of risk, were listed and remaining risks were quantified by using risk prioritisation numbers (RPNs). Nearly all sources of risk could be reduced to a safe level. However, touching critical spots as well as remaining micro-organisms after disinfection on stoppers or ampoule necks will still give a small risk of non-sterility. Besides, if aseptic handling is executed in a safety cabinet, the risk of blocking first air on critical spots cannot be completely excluded ('first air' and 'critical spot': definitions are given in online supplemental file 1).

The application of the developed RA and RC model and the effect of reducing the risk of nonsterility during aseptic handling in nine hospital pharmacies is described in this article. Implementation of risk reducing measures for each source of risk after an initial audit were tracked during a period of 4 years and evaluated after a final assessment. Results were expressed as a reduction of the RPN values.

In addition, if the chance of non-sterility has been reduced, better results of microbiological controls such as aseptic process simulation (APS) and microbiological monitoring (MM) are likely to be expected. Therefore, APS and MM were assessed as secondary outcomes.

The study focuses on non-hazardous products. However, most of the results and recommendations are also applicable to aseptic handling of hazardous products. There is only little experience with isolators in the Netherlands. Therefore, as in the previously published parts A and B, we restricted this study to aseptic handling done in a laminar airflow cabinet (LAF) or safety cabinet (SC).⁴⁵

MATERIALS AND METHODS Participating hospital pharmacies

Nine different kinds of hospital pharmacies (regional, top clinical and university) participated in this study. In these hospital pharmacies aseptic handling was carried out by well trained pharmaceutical technicians. Procedures are according to the chapter 'Aseptic handling of the Dutch GMP-hospital pharmacy'.⁶

Assessing aseptic handling in nine hospital pharmacies

The assessment of aseptic handling in the participating hospital pharmacies consisted of the following steps:

- 1. At the start of the study each hospital pharmacy was audited by an external pharmaceutical technician and an external hospital pharmacist as described in Part A.⁴ Risk reduction and remaining risks were entered into a risk assessment model, derived from figure 1 of part A. The corresponding RPN values for each source of risk were determined.
- 2. After this audit, each hospital pharmacy started an improvement programme, using the risk assessment as input. Results from APS and MM were also collected during the study period.
- 3. The participants were regularly informed about their progress in risk reduction and about the results of APS and MM of each participant.
- 4. At the end of the study (around 4 years after the start), a final assessment was executed by using a checklist with risk reducing measures for each source of risk. The description of the risk reducing measures was derived from figure 2, 3 and 4 of part B.⁵ The checklist was filled in by the principal investigator (F.A.B.) in consultation with the responsible staff.
- 5. The remaining risks and corresponding RPN value for each source of risk were determined by using an RA and RC template.

Microbiological controls

In all participating hospital pharmacies, the standard procedures for APS and MM, described by the Royal Dutch Pharmacists Association, have been used.^{7–9} APS is a broth simulation of the entire process and comprises all critical steps that occur during standard aseptic handling, by withdrawing a solution from a vial or ampoule, dissolving a powder in a vial and adding a solution to an infusion bag or vial. The broth solution used is Tryptone Soya Broth (TSB), Ph Eur. The final product is incubated for 14 days at 30°C and judged on either growth or no growth. The frequency is one APS preparation every working day.

The MM procedures are described in a condensed version in a previous article and consist of passive air sampling by settle plates, glove prints by 90 mm diameter agar plates and worktop prints by contact plates.⁸ The frequency is one sample of each kind of MM every working day.

Statistics

Contamination recovery rates (CRRs, a definition is given in online supplemental file 1) of MM were compared by p-values

using Fisher's exact test. For calculation of p-values, an online calculator was used.⁹

RESULTS

Participating hospital pharmacies

The study started with 10 hospital pharmacies, however in one pharmacy the production of non-hazardous products stopped. Therefore, the results from only nine hospital pharmacies were available for this study.

Table 1 is a short description of the participating hospital pharmacies. Some pharmacies produce a few thousand products each year (mainly parenteral nutrition), some produce more (up to nearly 100 000), for example if batches of syringes are filled or containers for portable infusion pump systems for outpatients are produced.

Assessing aseptic handling in nine hospital pharmacies

The risk assessment determined after the initial audit of hospital pharmacy 3 is shown in figure 1 (section 'risk assessment after initial audit'). The added up RPN value (cumulative RPN) is 780.

The complete checklist, which was used during the final assessment, is given in online supplemental file 2. An extract is given in figure 2. The checklist also gives an instruction for the final assessment.

If one of the risk reducing measures given in the checklist was implemented, the value(s) for O and/or D were reduced by the indicated number(s) of risk reduction in online supplemental file 2 and figure 2. For example, 'Worktop SC': a log for the registration of the daily disinfection of the worktop was introduced in hospital pharmacy 3 during the study period. This resulted in a reduction of D by one point (see figure 2, B: Worktop LAF/ SC). Another example, 'Critical spots (syringe tips, needles and the opening of tubes)': all additional risk reductions that were mentioned (see figure 2, D2: Critical spots), were implemented. O reduced by three points and D by two points.

Implemented risk reductions are indicated on the checklist. An example is given in online supplemental file 3 (this is the indicated checklist of hospital pharmacy 3). Additional risk reduction, remaining risk and the new values for O and D are entered into an RA and RC template as shown in figure 1 (section 'results after final assessment'). The cumulative RPN of hospital pharmacy 3 was reduced to 290 (see figure 1).

Table 2 contains the cumulative RPNs of all participating hospital pharmacies after the initial audit and after the final assessment. Table 2 also shows the implemented main additional risk reducing measures and an improvement ratio to express the

Table 1 Participa	ting hospital pharmacie	25		
Hospital number	Kind of hospital	Year cleanrooms constructed	Facilities and background area	Production 2019 (n)
1	Top clinical	2013	SC in grade C	4300
2	University	2012	SC in grade D	95 600
3	Top clinical	2008	SC in grade D	49500
4	Top clinical	1995/April 2019	SC in grade C	38400
5	Top clinical	2013	SC in grade C	15200
6	University	1981/November 2019	LAF in grade C	13700
7	Regional	2003	LAF in grade D	3200
8	Regional	2005	LAF in grade C	38 000
9	Regional	1986 /January 2017	LAF and SC in grade D	9800

Kind of hospital: regional, regional, regional hospital; top clinical, large hospital with a level and type of care similar to that offered by university hospitals; university, university hospital. Year cleanrooms constructed: if two dates are given, cleanrooms reconstructed during study period. Facilities and background area: background area; the room in which the LAF/SC is housed; grade C and grade D, EU grade C and grade D environment.²² Production 2019 (n): produced number of infusion bags, syringes, containers for portable infusion pump systems in 2019 (all non-hazardous products). LAF, laminar airflow cabinet; SC, safety cabinet.

Hospi	tal pharmacy 3	risk as	sessment after initial audit					results af	ter final assessment				
	sources of risk	risk reduction	remaining risk after first audit	s	0	D	R P 1 N	additional risk reduction	remaining risk	s	0		R P N :
A	Air	SC checked once a year by particle measurements, airflow velocity and HEPA	1. chance of environment around work zone at rest not in accordance with Grade A air	5		2	10		chance of environment around work zone at rest not in accordance with Grade A air			2	10
		filter integrity in at rest condition; daily air sampling by settle plate	 materials and equipment disturb the unidirectional airflow and can block first air at critical spots 				30	no	materials and equipment disturb the unidirectional airflow and can block first air at critical spots	5	2	3	30
в	Worktop SC	disinfection before each work session by wiping with ethanol 70% impregnated wipes; daily monitoring by contact plate	1. disinfection forgotten; contamination by materials used during preparation	5	3	3	45	disinfection at the beginning of a working day is registered in a log	contamination by materials used during preparation still excists	5	3	2	30
С	Wall and ceiling SC	daily surface disinfection by wiping with ethanol 70% impregnated wipes	1. disinfection forgotten		1		10	disinfection at the beginning of a working day is registered in a log	unlikely	5	1	1	5
	Materials with a sterile surface (sterile devices and infusion bags)	unwrapping in front of SC	1. contaminated outer layer		4		40	all operators in background area wear disposable gloves; original boxes are unpacked in front of lock with gloved hands; materials are used directly and/or stored in closed cupboards	transfer and storage is not audited		1		
					3		30	aseptic transfer is regularly audited and both operators correct each other	no aseptic transfer into SC by presentation		2		10
	Critical spots (syringe tips, needles and the opening of tubes)		1. contact of critical spots with the work top of SC	5	4	3	60	putting down syringes, needles and open tubes on a sterile pad in SC; use of sterile pad is regularly audited; both operators correct each other	unlikely	5	1	1	5
	Materials and equipment with a non- sterile surface	disinfection by wiping with ethanol 70% impregnated wipes	1. high surface bioburden before disinfection		3		45	ampoules and vials are transferred in their original boxes into the background area; materials are used directly and/or stored in closed cupboards	no periodical surface bioburden determination before disinfection; transfer and storage is not audited	5	1	3	15
	(ampoules, vials, bottles)		2. disinfection improperly done	5	4	4	80	thorough wiping by completely impregnated wipes; disinfection is regularly audited and both operators correct each other	no validated disinfection procedure; no regular surface monitoring of disinfected materials	5	2	3	30
			3. recontamination of disinfected materials	5	4	2	40	measures to prevent recontamination; measures to prevent changing disinfected and non-disinfected materials; measures are regularly audited and both operators correct each other	unlikely	5	1	1	5
	Critical spots (vial stoppers and ampoule necks)	additional disinfection in SC by wiping with sterile ethanol 70%	1. additional disinfection improperly done		3		60	precisely described and improved second disinfection technique; additional disinfection is regularly audited; both operators correct each other	still no assurance of a sterile surface		1		10
F	Operator's hands	sterile gloves, which are changed at least every hour; daily glove print by settle plate	1. glove damage		3		45	gloves integrity is tested immediately after putting them on and during processing; glove handling is regularly audited; both operators correct each other	unlikely		1		5
			2. surface contamination during putting on gloves		3		45	no	surface contamination during putting on gloves		3		45
			3. surface contamination during preparation		4		40	no	surface contamination during preparation		4		40
G	Operator's forearm	wearing cleanroom clothing which is changed every day	1. surface contamination of the worktop		3		30	operator wears sterile sleeves which are changed after every session	unlikely		1	· ·	5
н	Working procedure	working with two operators during processing; SOPs; operators trained in aseptic techniques; aseptic process	1. deviation from SOPs		3		45	accurate and up to date SOPs (enough details, univocal text); working according to SOPs is regularly audited; both operators correct each other	unlikely		1		5
		simulation with a broth solution	2. touching critical spots	5	4	4	80	additional training in non-touch working; non-touch working is regularly audited; both operators correct each other	chance of touch still excists	5	2	2	20
			3. SC (downflow), blocking first air at critical spots	5	3	3	45	prevention of blocking first air is regularly audited; both operators correct each other	chance of blocking first air still excists	5	2	1	10

Figure 1 Completed RA and RC template after the final assessment of hospital pharmacy 3. 780, cumulative RPN after the initial audit; 290, cumulative RPN after the final assessment; D, detection; O, occurrence; RPN, risk prioritisation number; S, severity.

relative risk reduction of each participant. Online supplemental file 4 contains the completed RA and RC templates of all participating hospital pharmacies.

Microbiological controls

APS results are expressed in contamination rates, which means the percentage of samples with growth. The results are

B: Worktop LAF/SC

Risk reduction: Disinfection before each work session by wiping with ethanol or isopropyl alcohol 70% impregnated wipes; daily monitoring by contact plate.

Remaining risk	0	D
Disinfection forgotten; contamination by materials used during preparation. Additional risk reduction:		
Disinfection at the beginning of a working day is registered in a log.		-1
Disinfection before each new prepared dosage form.	-1	
Disinfection before each new prepared dosage form is regularly audited.	-1	-1

D2: Critical spots (syringe tips, needles and the opening of tubes)

Remaining risk	0	D			
Contact of critical spots with the work top of LAF/SC. Additional risk reduction:					
Putting down syringes, needles and open tubes on a sterile pad in LAF/SC.	-2				
Use of sterile pad is regularly audited.	-1	-1			
Both operators correct each other.		-1			

Figure 2 An extract of the checklist with risk reducing measures; the complete checklist is given in online supplemental file 2. Risk reduction and remaining risk, listed in the checklist, were the mean results after the initial audits in the nine participating hospital pharmacies. D, detection; LAF, laminar airflow cabinet; O, occurrence; SC, safety cabinet.

summarised in table 3. Hospital pharmacies 6 and 7 had one sample with growth (2019 and 2016, respectively). The seven other hospital pharmacies had no growth during the study period.

MM results, expressed as CRR, are given in tables 4 and 5. They are derived from the LAF/SC most used in each hospital pharmacy. CRR results above 10% (the limit used in the Netherlands) appear in bold.¹⁰ To calculate reliable values for CRR, only results of 100 or more samples a year are given in tables 4 and $5.^{8}$

The results of air and worktop sampling did not change substantially during the study period (see table 4). Therefore, further statistical calculations for these results were not performed.

The results of glove prints from the start of the study (2016) and the end of the study (2019) were compared by Fisher's exact test. The results of hospital pharmacies 5 and 6 show a statistically significant improvement. The results of hospital pharmacy 9 also show a statistically significant difference. However, 2016 must be considered as a year with extremely low results (see table 5; before 2016, CRRs were 5.76% and 5.71% in 2014 and 2015, respectively).

DISCUSSION

Participating hospital pharmacies

There is no correlation between the results (cumulative RPNs as well as microbiological controls) and the kind of hospital, nor between the results and the age of the cleanrooms. Hospital pharmacies 1 and 9 had the overall best results at the end of the study (see tables 2 and 5).

0	rigi	nal	research

Eur J Hosp Pharm: first published as 10.1136/ejhpharm-2021-002747 on 7 July 2021. Downloaded from http://ejhp.bmj.com/ on April 19, 2024 by guest. Protected by copyright

Air Worktop, walls, celing SMD Ampoules and Hespital Karly Vourterly Wrapped Mrapped	Ampoules and vials				Cum	Cumulative Improvement
Anticipie Outering audit Numbed sine visible audit Numbed sine visible sin		Hands and forea	Hands and forearm of the operator	Working procedures	RPN cedures (RPN2)	l ratio (RPN2/ N2) RPN1)
+ 1 + + + + + 1 + 1 + + + 1 + 1 + + + 1 + 1	Improved additional Validated Monitoring disinfection disinfection after of critical technique disinfection spots	Check Good of glove putting on damage technique	Glove disinfection before start and every Sterile 15min sleeves	Non-touch working Accurate is a major and up topic to date during s SOPs audits	ch Prevention of blocking or first air is a major topic during audits	
1 + + + 1 + 1 + 1 + 1 1 1 + 1 1 1 + + 1 1 + + 1 1 1 + + 1 1 + + 1 1 + + 1 1 + + 1 1 1 1 1 1 + + 1 + + 1	+	+	+	+	+ 230	0.31
+ + + + + 1 + + + 1 1 + + + 1 + + + + + + + + + 1 + + + 1 + + 1	1	+	1	1	- 700	0.95
+ + + 1 + + + 1 + + + + + + + 1 1 1 + + 1	+	ı +	+	+	+ 290	0.37
+ + + + + + + + + + + + + + + +	1	۱ ++	+	+	+ 365	0.44
+ + + + 1	+	+	+	+	+ 280	0.35
	+	+	1	1	- 505	0.62
795 +	1	1	+	1	- 725	0.91
760 + - + + + + - + -	+	+	+	+	+ 280	0.37
630 + 1 + + + + + + +	+	+	+	++	+ 235	0.37
+, additional risk reduction implemented. –, additional risk reduction not implemented. "Continuous particle: counting Double ejooka eist fietcion started at the end of 2019.						

 Table 3
 Results of aseptic process simulation (APS) in nine hospital
 oharmacies

	2	2016	2	2017	2	018		2019
Hospital number	n	CR (%)	n	CR (%)	n	CR (%)	n	CR (%)
1	115	0	117	0	95	0	195	0
2	421	0	309	0	355	0	313	0
3	391	0	414	0	445	0	458	0
4	216	0	227	0	242	0	310	0
5	91	0	93	0	131	0	136	0
6	945	0	987	0	1015	0.1	955	0
7	195	0.51	160	0	246	0	169	0
8	х	х	96	0	501	0	461	0
9	277	0	384	0	284	0	310	0

R, contamination rate; hospital number, hospital pharmacy number in this study; n, number of amples examined: x. data not available

omments on the risk reduction of the different sources of risk

n this section comments and additional information about risk eduction of the different sources of risk are given.

ir

Aost hospital pharmacies own a particle counter, but only one id quarterly non-viable particle counting at rest around the vork zone ('at rest' and 'work zone': definitions are given in nline supplemental file 1); this lack of counting is a shame ecause non-viable particle counting is a simple experiment, hile the results will give valuable information about complying vith the at rest criteria for airborne particles.⁵

In hospital pharmacies 1, 8 and 9, videos about the risk of locking first air by materials were used to find the correct posion of materials inside LAF/SC.¹¹

The results of viable air sampling are already far below the 4M limits of up to 10% at the start of the study and did not eally change during the study period (see table 4). This is not urprising because there are no distinct sources to contaminate he air inside LAF/SC.⁵

Vorktop, walls and ceiling of LAF/SC

n all hospital pharmacies, except numbers 2, 3 and 7, the requency of worktop disinfection increased (see table 2). lowever, the expected decrease of the CRRs of the worktop rints could not be assessed because the number of samples as often too low to get reliable CRR values (marked as 'x' in ble 4).⁸ But a positive outcome was the number of pharmacies

Table 4	Results of air sampling and worktop prints in nine hospital
pharmac	es

Hospital		CRI	R air (%)			CRR wo	orktop (%)
number	2016	2017	2018	2019	2016	2017	2018	2019
1	1.15	1.60	0.27	1.17	2.34	0.80	2,61	0.88
2	5.56	7.19	3.35	5.19	3.59	4.10	4.51	3.29
3	2.14	0.63	1.14	2.03	х	х	Х	х
4	4.94	2.94	6.47	1.95	2.72	1.68	1.32	2.62
5	1.38	3.19	3.36	0.88	х	х	6.36	5.67
6	5.84	7.53	5.85	2.73	х	х	х	2.55
7	0.76	0.67	0.52	3.35	х	х	х	3.13
8	3.94	4.73	3.00	2.40	х	х	х	х
9	0.00	0.34	0.81	0.78	3.99	1.01	0.00	1.57
CRR, contamir not enough da					number in th	is study; x,	data not ava	ailable or

Table 5	Resu	esults of glove prints in nine hospital pharmacies																
			2016				2017			2018				2019				
Hospital number	n	pos	neg	CRR (%)	n	pos	neg	CRR (%)	n	pos	neg	CRR (%)	n	pos	neg	CRR (%)	p value	
1	390	5	385	1.28	376	13	363	3.46	361	8	353	2.22	349	5	344	1.43	1	
2	215	12	203	5.58	146	13	133	8.90	244	15	229	6.15	220	24	196	10.91	0.0549	
3	882	42	840	4.76	790	34	756	4.30	784	24	760	3.06	727	35	692	4.81	1	
4	157	23	134	14.65	129	21	108	16.28	162	27	135	16.67	208	35	173	17.24	0.6648	
5	290	39	251	13.45	226	23	203	10.18	299	21	278	7.02	452	37	415	8.19	0.0253	
6	585	99	486	16.92	623	109	514	17.50	517	76	441	14.70	1231	92	1139	7.47	0.0001	
7	132	10	122	7.58	120	16	104	13.33	194	8	186	4.12	179	16	163	8.94	0.8362	
8	501	64	437	12.77	493	56	437	11.36	603	48	555	7.96	637	60	577	9.42	0.0843	
9	294	5	289	1.70	298	13	285	4.36	246	8	238	3.25	255	13	242	5.10	0.0307	

Results above the 10% limit are in bold.

CRR, contamination recovery rate; n, number of samples examined; neg, number of samples without growth; hospital number, hospital pharmacy number in this study; pos, number of samples with one or more cfu; p value, CRR 2019 compared with CRR 2016.

where daily monitoring of the worktop was being implemented at the end of the study (increased from four to seven hospitals; see table 4).

Materials with a sterile surface (sterile medical devices)

Even after thorough disinfection, the worktop has to be considered as a non-sterile surface. Therefore, a sterile pad is advised to prevent contact between critical spots (syringe tips, needles, openings of tubes) and the surface of the worktop.¹² By the end of the study this pad was being used in four hospital pharmacies (see table 2). An alternative is to put syringes and needles on a sterile holder. Online supplemental file 5 gives an example.

Materials with a non-sterile surface (ampoules and vials)

Hospital pharmacies 5, 6 and 9 implemented the validated twotowel disinfection technique by using commercially available impregnated sterile polypropylene wipes.¹³ The two-towel technique was also introduced in hospital pharmacies 1 and 8, but these hospital pharmacies used cotton gauzes or medical nonwoven wipes, submerged in alcohol 70%. Compared with the commercially available polypropylene wipes, these gauzes and wipes are less expensive. However, a disadvantage of cotton or medical non-woven is the higher emission of particles and fibers. Hospital pharmacies 3 and 4 also improved the disinfection technique (see online supplemental file 4).

Dragging microorganisms across materials with a non-sterile surface is a serious risk.⁴ Therefore, regular surface monitoring after disinfection is strongly advised.^{13–15} This has been implemented in hospital pharmacies 8 and 9 (see table 2). A procedure for routine monitoring of materials with a non-sterile surface is described by Boom and colleagues.¹⁶

Operator's hands

This section refers to the hands of the primary operator (a definition of which is given in online supplemental file 1). The MM results of glove prints improved during the study period (see table 4). In addition, the frequent glove disinfection which started at the end of 2019 in hospital pharmacy 4 also led to results below the limit of 10% in the next year. Better results for glove prints are not only the result of more frequent glove disinfection, but also the result of more frequent worktop disinfection and better disinfection of materials with a non-sterile surface.⁵ However, if all these improvements are not implemented, a result below the MM limit of up to 10% is also possible (see figure 2, hospital pharmacy 7). Possible explanations for this

finding are a low surface bioburden of materials and/or concurrent disinfection of the gloves by the impregnated wipes used during the disinfection of materials and/or frequent glove changes. Besides, the technique of performing glove prints itself can have a great influence on the results.^{8 17} Contact time that is too short, for instance, as well as a too small printed surface of the distal phalanx of the fingers, will have a negative influence on the recovery and therefore on the results.

Operator's forearm

This section refers to the forearm of the primary operator. At the end of the study sterile sleeves were used in five hospital pharmacies. As mentioned in part B, sterile long-sleeved gloves will give the same protection as separate sterile gloves and sleeves.⁵

Working procedure

During the whole study period all contamination rates after APS are very low (see table 3). These results show, despite possibilities for risk reduction, that the operators were capable of producing products with a low chance of microbial contamination. However, a few remarks about these results can be made. First, during aseptic handling sometimes the preparation time is longer, and the number of preparation steps is larger compared with the usual applied broth simulation. Therefore, APS is not always a worst case simulation. Second, a more precise way of working during APS, compared with 'normal' aseptic handling, is not inconceivable. Third, not all aspects of the way of working can be measured by APS.¹⁸

In this connection, we emphasise the importance of a yearly audit of all operators as well as stimulating a policy of correcting each other. This not only has a great influence on risk reduction of working procedures, but also on many other sources of risk (see checklist in online supplemental file 2). At the end of the study auditing has been implemented in six hospital pharmacies (see table 2). More information about auditing can be found in part B.⁵

As mentioned in part A, two operators working together during processing is strongly recommended⁴; it makes a policy of correcting each other more workable as well as dividing activities that occur outside and inside LAF/SC and transferring materials into LAF/SC. All hospital pharmacies, except numbers 6, 8 and 9, were already working with two operators during processing at the start of the study. This did not change during the study.

Reducing the risk of non-sterility in nine hospital pharmacies

The cumulative RPN values at the start of the study varied from 630 to 825 (table 2). At the end of the study the differences were much greater, which leads to a cumulative RPN variation of 230 to 725 (see table 2). The improvement ratios also show great differences (see table 2). A sense of urgency and the time available for the implementation of the additional risk reducing measures are the main reasons for these differences. To enforce process changes, involvement of the responsible staff and the operators is an essential precondition. To enhance this, some hospital pharmacies work with a lean board and stand-up sessions and/or stimulate a policy to correct each other during operation. Additionally, for observing follow-up activities, it is important to use a system for corrective and preventive actions.¹⁹

Microbiological controls are an important part of the overall assurance of product quality.²⁰ Unfortunately, except for glove prints, we did not find a correlation between process improvement (lower cumulative RPN) and the results of microbiological controls. Explanations are given in the subsections above.

It is well known that microbiological controls alone will not cover all sources of risk of non-sterility.¹⁸ Therefore, according to the principles of a pharmaceutical quality system, it is necessary to evaluate all these sources.²¹ The relevance of each, in combination with the effort to reduce them, can be made clear by the RA and RC model, described in parts A and B.^{4.5}

Obviously, the implementation of the risk reducing measures will take time and/or will involve expense. For example, having an audit of two operators requires about 4 hours' work by the auditor.⁵ However, various measures can be implemented by only changing the way of working, without loss of productivity (for example, working without blocking first air on critical spots). Of course, a change itself will take time and energy, but a more robust process is a valuable result. Some measures will even save time, like transfer of ampoules and injection vials in their original white cardboard boxes into the background area (a definition of which is given in online supplemental file 1). This way of working keeps the surface bioburden of ampoules and vials low and shows no measurable influence on the particle burden in the background area.¹²

Application of risk assessment can also cast doubt on habits that have become general practice after years and years. For example, in previous articles we made clear that viable air sampling inside LAF/ SC is not sensitive enough for controlling the environment inside LAF/SC or for detecting a filter failure.^{5 8} Therefore, based on the principles of risk assessment, discontinuation of this MM method is a serious option.

Assessing aseptic handling in other hospital pharmacies

Assessing aseptic handling in other hospital pharmacies can also be done with the checklist available in online supplemental file 2. As mentioned above, an instruction for the assessment is given in the checklist. For determining the RPN values and the remaining risk, a 'blank' RA and RC template is available in online supplemental file 6.

The determined RPN values can be used for prioritising additional measures for risk reduction. RPN values over 30 are called 'not safe' (red) and must be reduced first.⁴

CONCLUSION

Systematic and science-based reduction of the risks of non-sterility can be done by using a checklist with risk reducing measures and an RA and RC template. Prospectively, the relevance of each risk reducing measure can be demonstrated by RPN calculations. Of all risk reducing measures, a yearly audit of all operators has the greatest impact on reducing the risk of non-sterility. Microbiological controls are an important part of the overall assurance of product quality. However, a correlation between the results of these controls and the RPN values, looking at the risk of non-sterility, is difficult to prove.

What this paper adds

What is already known on this subject?

- ⇒ Aseptic handling has to be executed with aseptic precautions in a laminar airflow cabinet, safety cabinet or isolator.
- \Rightarrow The operator is the highest source of risk of non-sterility.

What does this study adds?

- ⇒ Risks of non-sterility and measures to reduce it can be objectified by a risk assessment and risk control model.
- ⇒ Of all risk reducing measures, a yearly audit of all operators has the greatest impact on reducing the risk of non-sterility.
- ⇒ The results of microbiological controls are less useful for assessing the risk of non-sterility.

Contributors The first author did the experimental work and wrote the draft text. The other authors participated in the design and review of the study.

Funding The authors have not declared a specific grant for this research from any funding agency in the public, commercial or not-for-profit sectors.

Competing interests None declared.

Patient consent for publication Not required.

Provenance and peer review Not commissioned; externally peer reviewed.

Data availability statement All data relevant to the study are included in the article or uploaded as supplementary information.

Supplemental material This content has been supplied by the author(s). It has not been vetted by BMJ Publishing Group Limited (BMJ) and may not have been peer-reviewed. Any opinions or recommendations discussed are solely those of the author(s) and are not endorsed by BMJ. BMJ disclaims all liability and responsibility arising from any reliance placed on the content. Where the content includes any translated material, BMJ does not warrant the accuracy and reliability of the translations (including but not limited to local regulations, clinical guidelines, terminology, drug names and drug dosages), and is not responsible for any error and/or omissions arising from translation and adaptation or otherwise.

Open access This is an open access article distributed in accordance with the Creative Commons Attribution 4.0 Unported (CC BY 4.0) license, which permits others to copy, redistribute, remix, transform and build upon this work for any purpose, provided the original work is properly cited, a link to the licence is given, and indication of whether changes were made. See: https://creativecommons.org/ licenses/by/4.0/.

REFERENCES

- 1 Resolution CM/Res(2016)2 on good reconstitution practices in health care establishments for medicinal products for parenteral use. Available: https://www. edqm.eu/sites/default/files/resolution_cm_res_2016_2_good_reconstitution_ practices_in_health_care_establishments_for_medicinal_products_for_parenteral_ use_.pdf [Accessed 15 Jan 2021].
- 2 Thompson RW, Belisle C. Respecting the risks of sterile compounding. Am J Health Syst Pharm 2015;72:1269.
- 3 Larmené-Beld KHM, Frijlink HW, Taxis K. A systematic review and meta-analysis of microbial contamination of parenteral medication prepared in a clinical versus pharmacy environment. *Eur J Clin Pharmacol* 2019;75:609–17.
- 4 Boom FA, Ris JM, Veenbaas T, et al. Reducing the risk of non-sterility of aseptic handling in hospital pharmacies, part A: risk assessment. Eur J Hosp Pharm 2022;29:151–6.
- 5 Boom FA, Ris JM, Veenbaas T, et al. Reducing the risk of non-sterility of aseptic handling in hospital pharmacies, part B: risk control. Eur J Hosp Pharm 2021;28:325–30.
- 6 Dutch association of hospital pharmacists. Z3 aseptic handling. In GMP-Hospital pharmacy, 2013. Available: https://nvza.nl/wp-content/uploads/2016/04/Z3-GMPZ_ Herziening-2013-Z3-Aseptische-handelingen-def-IGZ.pdf [Accessed 15 Jan 2021].
- 7 Royal Dutch Pharmacists Association. LNA-procedure Validatie aseptische werkwijze, 2010. Available: https://kennisbank.knmp.nl/ [Accessed 15 Jan 2021].
- 8 Boom FA, Brun PPHL, Bühringer S, et al. Microbiological monitoring during aseptic handling: methods, limits and interpretation of results. Eur J Pharm

Original research

Sci 2020;155:105540 https://www.sciencedirect.com/science/article/pii/ S0928098720303286

- 9 QuickCalcs G. Fisher's and chi-square. Analyze a 2x2 contingency table. Available: https:// https://www.graphpad.com/quickcalcs/contingency1/ [Accessed 15 Jan 2021].
- 10 Royal Dutch Pharmacists Association. LNA-procedure Microbiologische monitoring, opstellen bemonsteringsplan en beoordelen van de resultaten, 2019. Available: https://kennisbank.knmp.nl/ [Accessed 15 Jan 2021].
- 11 YouTube. Keep critical spots in first air. Available: https://www.youtube.com/channel/ UCYicF1ULbvVkniF3Hr0gCyA?view_as=subscriber [Accessed 15 Jan 2021].
- 12 Boom FA, Le Brun PPH, Boehringer S. Improving the aseptic transfer procedures in hospital pharmacies Part C: evaluation and redesign of the transfer process., 2019. Available: https://ejhp.bmj.com/content/early/2019/10/29/ejhpharm-2019-002034 [Accessed 15 Jan 2021].
- 13 Boom FA, Le Brun PPH, Boehringer S. Improving the aseptic transfer procedures in hospital pharmacies Part B: disinfection methods for materials with a non-sterile surface. published online by EU J Hosp pharm, 2019. Available: https://ejhp.bmj.com/ content/early/2019/08/24/ejhpharm-2018-001673 [Accessed 15 Jan 2021].
- 14 Beaney AM. Quality assurance of aseptic preparation services: standards handbook. UK: Pharmaceutical Press, 2016.
- 15 Eu good manufacturing practice (GMP) Annex 1 2nd revision. manufacture of sterile medicinal products, 2020. Available: https://ec.europa.eu/health/sites/health/files/ files/gmp/2020_annex1ps_sterile_medicinal_products_en.pdf [Accessed 15 Jan 2021].

- 16 Boom FA, Le Brun PPH, Boehringer S, et al. Improving the aseptic transfer procedures in hospital pharmacies Part A: methods for the determination of the surface bioburden on ampoules and vials. Eur J Hosp Pharm 2021;28:38–41.
- 17 Royal Dutch Association of Pharmacists. LNA-procedure Microbiologische monitoring, uitvoering monstername, 2019. Available: https://kennisbank.knmp.nl/ [Accessed 15 Jan 2021].
- 18 Parenteral Drug Association. *Technical report no. 44: quality risk management for aseptic processing*. Parenteral Drug Association, 2008.
- 19 Bouwman-Boer Y, Møller Andersen A. Pharmaceutical quality system. In: Bouwman-Boer Y, Fenton-May V, le Brun PPH, eds. *Practical pharmaceutics*. Switzerland: Springer International Publishing, 2015: 769–96.
- 20 Tidswel EC, Boone K. Environmental and personnel monitoring programs -a risk-based case study of *cutibacterium acnes*. *PDA J Pharm Sci Technol* 2020;74:408–22.
- 21 EU GMP chapter 1. the rules governing medicinal products in the European union. EU legislation - eudralex -volume 4 good manufacturing practice (GMP) guidelines. chapter 1. pharmaceutical quality system, 2013. Available: https://ec.europa.eu/ health/sites/health/files/files/eudralex/vol-4/vol4-chap1_2013-01_en.pdf [Accessed 15 Jan 2021].
- 22 EU GMP Annex 1. The rules governing medicinal products in the European Union. EU legislation eudralex -volume 4 good manufacturing practice (GMP) guidelines. Annex I. manufacture of sterile medicinal products, 2009. Available: https://ec.europa.eu/health/sites/health/files/files/eudralex/vol-4/2008_11_25_gmp-an1_en.pdf [Accessed 15 Jan 2021].

SUPPLEMENTARY FILE 1

Definitions

- Anteroom is a room inside the clean air area, adjacent to the background area.
- At rest is a room (an environment) complete with all HVAC systems, utilities functioning and with manufacturing equipment installed as specified but without personnel in the facility and the manufacturing equipment is static [1].
- Background area is the room in which the LAF/SC is housed.
- Critical spot is a surface (spot) that may come into contact with a sterile fluid [1]; in the case of aseptic handling a conus of a syringe, a needle, an opening of a tube, an injection puncture, a vial stopper or the neck of an ampoule.
- Contamination recovery rate (CRR) is the percentage of samples that show any microbial recovery, irrespective of the number of cfu [2].
- First air is air from a HEPA filter on a surface without having been obstructed by a nonsterile surface.
- Grade A air is air which is passed through a filter qualified as capable of producing grade A non-viable quality air, but where there is no requirement to continuously perform non-viable monitoring or meet grade A viable monitoring limits [1].
- Primary operator is the operator who performs all tasks inside LAF/SC [3].
- Unidirectional flow is an airflow moving in a single direction, in a robust and uniform manner, and at sufficient speed, to reproducibly sweep particles away from the critical processing or testing area [1].
- Work zone is that part of the worktop inside LAF/SC where the preparation activities are executed.

References

- EU Good manufacturing practice (GMP) Annex 1 Revision. Manufacture of sterile medicinal products. December 2017. <u>http://academy.gmp-</u> <u>compliance.org/guidemgr/files/2017 12 PC ANNEX1 CONSULTATION DOCUMENT.</u> <u>PDF</u> (accessed 15 January 2021).
- The United States Pharmacopeia USP 35. The United States Pharmacopeia Convention. Rockville. <1116> Microbiological control and monitoring of aseptic processing environments, 2012.
- Boom FA, Le Brun PPH, Ris J, Veenbaas TJ, Touw DJ. Reducing the risk on non-sterility of aseptic handling in hospital pharmacies Part A: Risk Assessment. May 2020. Published online by Eu J Hosp Pharm. <u>https://ejhp.bmj.com/content/early/2020/05/08/ejhpharm-2019-002178</u> (accessed 15 January 2021).

SUPPLEMENTARY FILE 2

Checklist with risk reducing measures for each source of risk.

This checklist was used during the final assessment of the 9 hospital pharmacies (around 4 years after the start of the study).

In combination with a 'blank' RA & RC template (available in online supplementary file 6) this checklist can also be used for assessing aseptic handling in other hospital pharmacies. It is recommended this is done by two people, all familiar with the SOPs and the way aseptic handling is executed in the assessed hospital pharmacy.

The following steps must be taken:

- Check for each source of risk if the measures, listed after the words 'Risk reduction', are implemented. If not, implementation is recommended, but should not be taken into account in the tables below.
- Determine for each remaining risk, listed in the tables below, if it has been carried out or not. If yes, circle the corresponding number(s) in the column 'O' and/or 'D' (see Online supplementary file 3 as an example).
- 3. Add each additional risk reduction and each remaining risk of each source of risk in the blank RA & RC template in the corresponding columns of the section 'results after assessing aseptic handling' (see figure 1 as an example).
- 4. Diminish the value(s) for O and/or D in the RA & RC template by the corresponding circled numbers in the column 'O' and/or 'D' of the checklist. The new values for O and D have to be entered into the corresponding columns of the section 'results after assessing aseptic handling' (see figure 1 as an example). The new RPNs are calculated automatically.

Checklist, see page 2 - 6

hospital pharmacy:	date of the assessment:

Risk reduction and Remaining risk, listed in the checklist, were the mean results after the initial

audits in the nine participating hospital pharmacies.

D, detection; LAF, laminar airflow cabinet; O, occurrence; SC, safety cabinet.

A: Air inside LAF/SC

Risk reduction: LAF/SC checked once or twice a year by particle measurements, airflow velocity and HEPA filter integrity in at rest* condition. Daily monitoring by settle plate.

Remaining risk	0	D
1. Chance of environment around work zone* at rest not in accordance with Grade		
A air*.		
Additional risk reduction:		
non-viable particle counting in work zone at rest at least quarterly		- 1
2. Materials and equipment disturb the unidirectional flow* and can block first air*		
at critical spots*		
Additional risk reduction:		
correct position of materials after investigations by airflow visualization in		-1
worst case situation		
• position of materials is regularly audited and both operators correct each	-1	-1
other		

* see definitions

B: Worktop LAF/SC

Risk reduction: Disinfection before each work session by wiping with ethanol or isopropyl alcohol 70% impregnated wipes; daily monitoring by contact plate.

Remaining risk	0	D
1. Disinfection forgotten; contamination by materials used during preparation.		
Additional risk reduction:		
 Disinfection at the beginning of a working day is registered in a log. 		-1
Disinfection before each new prepared dosage form.	-1	
Disinfection before each new prepared dosage form is regularly audited.	-1	-1

C: Wall and ceiling LAF/SC

Risk reduction: Daily surface disinfection by wiping with ethanol or isopropyl alcohol 70% impregnated wipes.

Remaining risk	0	D
1. Disinfection forgotten.		
Additional risk reduction:		
• Disinfection at the beginning of a working day is registered in a log.		-1

D1: Materials with a sterile surface (sterile medical devices and infusion bags)

Risk reduction: Unwrapping in front of LAF/SC.

Remaining risk	0	D
1. Contaminated outer layer.		
Additional risk reduction:		
 All operators in background area* (and anteroom*) wear disposable (sterile) gloves. 	-1	
• Unpack original boxes in front of the lock with gloved hands, put materials directly into the lock.	-1	
• Use materials directly and/or store materials in closed cupboards.	-1	
Transfer and storage are audited at least yearly.		-1
2. Parts of outer layer inside LAF/SC.		
Additional risk reduction:		
Aseptic transfer into LAF/SC by presentation.	-1	
• Aseptic transfer is regularly audited and both operators correct each other.	-1	-1

* see definitions

D2: Critical spots* (syringe tips, needles and the opening of tubes)

Remaining risk	0	D
1. Contact of critical spots with the work top of LAF/SC.		
Additional risk reduction:		
• Putting down syringes, needles and open tubes on a sterile pad in LAF/SC.	-2	
Use of sterile pad is regularly audited.	-1	-1
Both operators correct each other.		-1

* see definitions

E1: Materials and equipment with a non-sterile surface (ampoules, vials, bottles)

Risk reduction: Disinfection by wiping with ethanol or isopropyl alcohol 70%.

0	D
-1	
-1	
	-1
	-1
-1	
-1	
	-2
-1	-1
-1	
-1	
-1	-1
	-1 -1 -1 -1 -1 -1 -1 -1 -1

* see definitions

E2: Critical spots* (vial stoppers and ampoule necks)

Risk reduction: Additional disinfection in LAF/SC by wiping with sterile ethanol or isopropyl alcohol 70%.

Remaining risk	0	D
1. Additional disinfection improperly done.		
Additional risk reduction:		
 Precisely described and improved additional disinfection technique (thorough wiping and > 30 sec waiting time). 	-1	
Additional disinfection is regularly audited.	-1	-1
Both operators correct each other.		-1

* see definitions

F: Operator's hands

Risk reduction: Sterile gloves, which are changed at least every hour; daily glove print by settle plate.

Remaining risk	0	D
1. Glove damage.		
Additional risk reduction:		
 Check gloves integrity immediately after putting them on and during processing. 	-1	
Glove handling is regularly audited.	-1	-1
Both operators correct each other.		-1
2. Surface contamination during putting on gloves.		
Additional risk reduction:		
Good putting on technique.	-1	
Putting on gloves is regularly audited.	-1	-1
Both operators correct each other.		-1
3. Surface contamination during preparation.		
Additional risk reduction:		
 Glove disinfection before start of each new preparation and every 15 min during a long preparation. 	-2	
• Glove disinfection is regularly audited and both operators correct each other.	-1	-1

G: Operator's forearm

Risk reduction: Wearing cleanroom clothing which is changed every day.

Remaining risk	0	D
1. Surface contamination of the worktop.		
Additional risk reduction:		
Operator wears sterile sleeves which must be changed after every session.	-2	-1

H: Working procedure

Risk reduction: Working with two operators during processing; SOPs; operators trained in aseptic techniques; aseptic process simulation with a broth solution.

Remaining risk	0	D
1. Deviation from SOPs.		
Additional risk reduction:		
 Accurate and up to date SOPs (enough details, univocal text). 	-1	
Working according to SOPs is regularly audited.	-1	-1
Both operators correct each other.		-1
2. Touching critical spots*.		
Additional risk reduction:		
Additional training in non-touch working.	-1	
Non-touch working is regularly audited.	-1	-1
Both operators correct each other.		-1
3. Blocking first air* at critical spots.		
Additional risk reduction:		
Prevention of blocking first air is regularly audited.	-1	-1
Both operators correct each other.		-1

* see definitions

SUPPLEMENTARY FILE 3

Filled in checklist of Hospital pharmacy 3.

Checklist, see page 2 - 6

hospital pharmacy:	Number	3	date of the assessment:	May	25,	2020

Risk reduction and **Remaining risk**, listed in the checklist, were the mean results after the initial audits in the nine participating hospital pharmacies.

D, detection; LAF, laminar airflow cabinet; O, occurrence; SC, safety cabinet.

A: Air inside LAF/SC

Risk reduction: LAF/SC checked once or twice a year by particle measurements, airflow velocity and HEPA filter integrity in at rest* condition. Daily monitoring by settle plate.

Remaining risk	0	D
1. Chance of environment around work zone* at rest not in accordance with Grade		
A air*.		
Additional risk reduction:		
 non-viable particle counting in work zone at rest at least quarterly 		- 1
 Materials and equipment disturb the unidirectional flow* and can block first air* at critical spots* 		
Additional risk reduction:		
 correct position of materials after investigations by airflow visualization in worst case situation 		-1
 position of materials is regularly audited and both operators correct each other 	-1	-1

* see definitions

B: Worktop LAF/SC

Risk reduction: Disinfection before each work session by wiping with ethanol or isopropyl alcohol 70% impregnated wipes; daily monitoring by contact plate.

Remaining risk	0	D
1. Disinfection forgotten; contamination by materials used during preparation. Additional risk reduction:		
• Disinfection at the beginning of a working day is registered in a log.		(-1
Disinfection before each new prepared dosage form.	-1	
• Disinfection before each new prepared dosage form is regularly audited.	-1	-1

C: Wall and ceiling LAF/SC

Risk reduction: Daily surface disinfection by wiping with ethanol or isopropyl alcohol 70% impregnated wipes.

Remaining risk	0	D
1. Disinfection forgotten.		
Additional risk reduction:		
• Disinfection at the beginning of a working day is registered in a log.		(-1)

D1: Materials with a sterile surface (sterile medical devices and infusion bags) Risk reduction: Unwrapping in front of LAF/SC.

Rema	ining risk	0	D
1. Cor	ntaminated outer layer.		
Addit	ional risk reduction:		
	ll operators in background area* (and anteroom*) wear disposable (sterile) oves.	-1	
	npack original boxes in front of the lock with gloved hands, put materials rectly into the lock.	-1	
• U	se materials directly and/or store materials in closed cupboards.	(-1)	
• Ti	ransfer and storage are audited at least yearly.		-1
2. Par	ts of outer layer inside LAF/SC.		
Addit	ional risk reduction:		
• A:	septic transfer into LAF/SC by presentation.	-1	
• A	septic transfer is regularly audited and both operators correct each other.	(-1)	(-1)

* see definitions

D2: Critical spots* (syringe tips, needles and the opening of tubes)

Remaining risk	0	D
1. Contact of critical spots with the work top of LAF/SC.		
Additional risk reduction:		
• Putting down syringes, needles and open tubes on a sterile pad in LAF/SC.	-2	
Use of sterile pad is regularly audited.	-1	-1
Both operators correct each other.		(-1

* see definitions

E1: Materials and equipment with a non-sterile surface (ampoules, vials, bottles) Risk reduction: Disinfection by wiping with ethanol or isopropyl alcohol 70%.

 High surface bioburden before disinfection. Additional risk reduction: 		
Additional risk reduction:		1
Transfer ampoules and vials in their original boxes into the background area*.	(-1)	
 Store materials not directly used in their original boxes in the background area in closed cupboards. 	-1	
Periodical surface bioburden determination before disinfection.		-1
Transfer and storage are audited at least yearly.		-1
2. Disinfection improperly done.		
Additional risk reduction:	-	
Thorough wiping by completely impregnated wipes.	-1	
Disinfection by a validated disinfection procedure.	-1	
Regular surface monitoring of disinfected materials.		-2
Disinfection is regularly audited and both operators correct each other.	(-1)	(-1)
c. Recontamination of disinfected materials.		
Additional risk reduction:	1.000	
Measures to prevent recontamination.	-1	
Measures to prevent changing disinfected and non-disinfected materials.	-1	
Measures are regularly audited and both operators correct each other.	(-1)	(-1)

* see definitions

E2: Critical spots* (vial stoppers and ampoule necks)

Risk reduction: Additional disinfection in LAF/SC by wiping with sterile ethanol or isopropyl alcohol 70%.

Rem	naining risk	0	D
1. A	dditional disinfection improperly done.		
Add	itional risk reduction:		
	Precisely described and improved additional disinfection technique (thorough wiping and > 30 sec waiting time).	-1	
•	Additional disinfection is regularly audited.	(-1)	(-1)
•	Both operators correct each other.		(-1

* see definitions

F: Operator's hands

Risk reduction: Sterile gloves, which are changed at least every hour; daily glove print by settle plate.

Remaining risk	0	D
1. Glove damage.		
Additional risk reduction:		
 Check gloves integrity immediately after putting them on and during processing. 	(-1)	
Glove handling is regularly audited.	-1	-1
Both operators correct each other.		(-1)
2. Surface contamination during putting on gloves. Additional risk reduction:		
Good putting on technique.	-1	
 Putting on gloves is regularly audited. 	-1	-1
Both operators correct each other.		-1
3. Surface contamination during preparation.		
Additional risk reduction:		
 Glove disinfection before start of each new preparation and every 15 min during a long preparation. 	-2	
• Glove disinfection is regularly audited and both operators correct each other.	-1	-1

G: Operator's forearm

Risk reduction: Wearing cleanroom clothing which is changed every day.

Remaining risk	0	D
1. Surface contamination of the worktop.		
Additional risk reduction:		
Operator wears sterile sleeves which must be changed after every session.	(-2)	(-1)

H: Working procedure

Risk reduction: Working with two operators during processing; SOPs; operators trained in aseptic techniques; aseptic process simulation with a broth solution.

Remaining risk	0	D
1. Deviation from SOPs.		
Additional risk reduction:		
 Accurate and up to date SOPs (enough details, univocal text). 	(-1)	
 Working according to SOPs is regularly audited. 	(-1)	(-1)
Both operators correct each other.		(-1)
2. Touching critical spots*.		
Additional risk reduction:		
Additional training in non-touch working.	(-1)	
Non-touch working is regularly audited.	(-1)	(-1)
Both operators correct each other.		(-1)
3. Blocking first air* at critical spots.		
Additional risk reduction:		
 Prevention of blocking first air is regularly audited. 	(-1)	(-1)
Both operators correct each other.		(-1)

* see definitions

6/6

Supplementary file 4

Filled in RA&RC templates after the final assessment of the nine participating hospital pharmacies

Hosp	ital pharmacy 1	risk assessmen	t after initial audit					results after final asses					
	sources of risk	risk reduction	remaining risk after first audit	s	0	D	R P N 1	additional risk reduction	remaining risk				
A	Air	SC checked once a year by particle measurements, airflow velocity and HEPA filter integrity in at rest condition; daily air sampling by settle plate	1. chance of environment around work zone at rest not in accordance with Grade A air		1	2	10	no	chance of enviro zone at rest not Grade A air				
			2. materials and equipment disturb the unidirectional airflow and can block first air at critical spots		2		30	correct position of materials after investigation by airflow visualization in worst case situation; position of materials is regularly audited; both operators correct each other	unlikely				
В	Worktop SC	disinfection before each work session by wiping with ethanol 70% impregnated wipes; daily monitoring by contact plate; disinfection at the beginning of a working day is registered in a log	1. contamination by materials used during preparation	5	3	2	30	disinfection before each new prepared dosage form; disinfection before each new prepared dosage form is regularly audited	unlikely				
С	Wall and ceiling SC	daily surface disinfection by wiping with ethanol 70% impregnated wipes; disinfection at the beginning of a working day is registered in a log	unlikely	5	1	1	5	no	unlikely				
D1	Materials with a sterile surface (sterile devices	unwrapping in front of SC; all operators in background area wear disposable gloves; materials are used directly and/or store in closed cupboards	1. contaminated outer layer		2			original boxes are unpacked in front of lock with gloved hands	transfer and sto				
	and infusion bags)		2. parts of outer layer inside SC	5	3	2	30	aseptic transfer is regularly audited and both operators correct each other	no aseptic trans presentation				
D2	Critical spots (syringe tips, needles and the opening of tubes)*		1. contact of critical spots with the work top of SC	5	4	3	60	putting down syringes, needles and open tubes on a sterile pad in SC; use of sterile pad is regularly audited; both operators correct each other	unlikely				
E1	Materials and equipment with a non- sterile surface	disinfection by wiping with ethanol 70% impregnated wipes	disinfection			3		ampoules and vials are transferred into the anteroom in their original boxes; materials are used directly and/or stored in closed cupboards	no periodical su determination be transfer and sto				
	(ampoules, vials, bottles)		2. disinfection improperly done			4		thorough wiping by completely impregnated wipes; disinfection is regularly audited and both operators correct each other	no validated disi no regular surfa disinfected mate				
			3. recontamination of disinfected materials	5	4	2	40	measures to prevent recontamination; measures to prevent changing disinfected and non-disinfected materials; measures are regularly audited and both operators correct each other	unlikely				
E2	Critical spots (vial stoppers and ampoule necks)	additional disinfection in SC by wiping with sterile ethanol 70%	1. additional disinfection improperly done	5	3	4	60	precisely described and improved additinal disinfection technique; additional disinfection is regularly audited; both operators correct each other	still no assuranc				
F	Operator's hands	sterile gloves, which are changed at least every hour; daily glove print by settle plate	1. glove damage			3		gloves integrity is tested immediately after putting them on and during processing; glove handling is regularly audited; both operators correct each other	unlikely				
1			2 curface contamination during	E	2	2	45	good putting on technique: putting on gloves is regularly	uplikoly				

2. surface contamination during

3. surface contamination during

. deviation from SOPs

2. touching critical spots

3. SC (downflow), blocking first air

putting on gloves

preparation

worktop

at critical spots

wearing cleanroom clothing which is changed every 1. surface contamination of the

working with two operators during processing;

SOPs; operators trained in aseptic techniques by

broth simulations every year; process validation by

HP 1, Hospital pharmacy 1; S, severity; O, occurrence; D, detection; RPN, Risk Prioritization Number. 740, cumulative RPN after the initial audit; 230, cumulative RPN after the final assessment.

5 3 3

5 4 2

5 3 3

5 3 3

5 4

5 3 2 <u>30</u> no

4

740

G Operator's forearm

H Working procedure

day

broth simulation

	results after final assessment											
additional risk reduction	remaining risk	S	0	D	R P N 2							
zo	chance of environment around work zone at rest not in accordance with Grade A air	5	1	2	10							
	unlikely	5	1	1	5							
	unlikely	5	1	1	5							
no ui	unlikely	5	1	1	5							
original boxes are unpacked in front of lock with gloved transformed transformed transformed to the transformed transformed to the transformed to	ransfer and storage is not audited	5	1	2	10							
correct each other pr	no aseptic transfer into SC by presentation	5	2	1	10							
pad in SC; use of sterile pad is regularly audited; both operators correct each other	unlikely	5	1	1	5							
original boxes; materials are used directly and/or stored in closed cupboards	no periodical surface bioburden determination before disinfection; ransfer and storage is not audited	5	1	3	15							
disinfection is regularly audited and both operators correct	no validated disinfection procedure; no regular surface monitoring of disinfected materials	5	2	3	30							
measures to prevent recontamination; measures to prevent un changing disinfected and non-disinfected materials; measures are regularly audited and both operators correct each other	unlikely	5	1	1	5							
	still no assurance of a sterile surface	5	1	2	10							
gloves integrity is tested immediately after putting them on and during processing; glove handling is regularly audited; both operators correct each other	unlikely	5	1	1	5							
	unlikely	5	1	1	5							
glove disinfection before start of each new preparation and every 15 min during a long preparation; glove disinfection is regularly audited and both operators correct each other	unlikely	5	1	1	5							
no si	surface contamination of the worktop	5	3	2	30							
	deviation from SOPs chance of touch still exists	5 5	3 2	3	45 20							
prevention of blocking first air is regularly audited; both choperators correct each other	chance of blocking first air still exists	5	2	1	10 230							

Hospi	tal pharmacy 2	risk assess	ment after initial audit					resu	ts after final assessment				
	sources of risk	risk reduction	remaining risk after first audit	s	0	D	R P N 1	additional risk reduction	remaining risk	s	0	D	R P N 2
A		SC checked once a year by particle measurements, airflow velocity and HEPA filter integrity in at rest condition; daily air	1. chance of environment around work zone at rest not in accordance with Grade A air	5	1	2	10	no	chance of environment around work zone at rest not in accordance with Grade A air	5	1	2	1
		sampling by settle plate	 materials and equipment disturb the unidirectional airflow and can block first air at critical spots 	5	2	3	30	no	materials and equipment disturb the unidirectional airflow which can result in blocking first air at critical spots	5	2	3	31
В	·	disinfection before each work session by wiping with ethanol 70% impregnated wipes; daily monitoring by contact plate	1. disinfection forgotten; contamination by materials used during preparation	5	3	3	45	disinfection at the beginning of a working day is registered in a log	contamination by materials used during preparation still exists	5	3	2	3
С	Wall and ceiling SC	daily surface disinfection by wiping with ethanol 70% impregnated wipes	1. disinfection forgotten	5	1	2	10	disinfection at the beginning of a working day is registered in a log	unlikely	5	1	1	5
	surface (sterile	unwrapping in front of SC; materials are used directly and/or stored in closed cupboards	1. contaminated outer layer			2	30	all operators in background area wear disposable gloves	no unpacking original boxes in front of lock with gloved hands; transfer and storage is not audited			2	
	bags)		2. parts of outer layer inside SC	5	3	2	30	no	parts of outer layer inside SC	5	2	3	3
	Critical spots (syringe tips, needles and the opening of tubes)		1. contact of critical spots with the work top of SC	5	4	3	60	no	contact of critical spots with the work top of SC	5	4	3	6
	Materials and equipment with a non-	disinfection by wiping with ethanol 70% impregnated wipes	1. high surface bioburden before disinfection	5	3	3	45	no	high surface bioburden before disinfection	5	3	3	4
	sterile surface		2. disinfection improperly done	5	4	4	80	no	disinfection improperly done	5	4	4	8
	(ampoules, vials, bottles)		3. recontamination of disinfected materials	5	4	2	40	no	recontamination of disinfected materials	5	4	2	4
		additional disinfection in SC by wiping with sterile ethanol 70%	1. additional disinfection improperly done	5	3	4	60	no	additional disinfection improperly done	5	3	4	6
F	Operator's hands	wearing sterile gloves, which are changed	1. glove damage	5	2	3	30	no	glove damage	5	2	3	3
	-	at least every hour; good putting on	2. putting on gloves is not audited	5	2	3	30	no	putting on gloves is not audited	5	2	3	;
		technique; daily glove print by settle plate	3. surface contamination during preparation	5	4	2	40	glove disinfection before start of each new preparation and in between every 30 min	no glove disinfection every 15 min during a long preparation; glove disinfection is not regularly audited and both operators don't correct each other	5	3	2	3
G		wearing cleanroom clothing which is changed every day	1. surface contamination of the worktop	5	2	3	30	no	surface contamination of the worktop	5	2	3	3
Н	Working procedure	working with two operators during	1. deviation from SOPs	5	3	3	45	no	deviation from SOPs	5	3	3	4
		processing; SOPs; operators trained in	2. touching critical spots	5	4	4	80	no	touching critical spots	5	4	4	8
		aseptic techniques; aseptic process simulation with a broth solution	c. SC (downflow), blocking first air at critical spots	5	3	3	45	no	blocking first air at critical spots	5	3	3	4

HP 2, Hospital pharmacy 2; S, severity; O, occurrence; D, detection; RPN, Risk Prioritization Number. 740, cumulative RPN after the initial audit; 700, cumulative RPN after the final assessment.

Hosp	ital pharmacy 3	risk asse	ssment after initial audit					results after final assessment					
	sources of risk	risk reduction	remaining risk after first audit	s	D I		R P 1 N	additional risk reduction	remaining risk	S	0	D	R P N
A	Air	SC checked once a year by particle measurements, airflow velocity and HEPA filter integrity in at rest condition; daily air	1. chance of environment around work zone at rest not in accordance with Grade A air	5	1 1	2	10	no	chance of environment around work zone at rest not in accordance with Grade A air	5	1	2	1
		sampling by settle plate	2. materials and equipment disturb the unidirectional airflow and can block first air at critical spots	5	2 :	3	30	no	materials and equipment disturb the unidirectional airflow and can block first air at critical spots	5	2	3	3
В	Worktop SC	disinfection before each work session by wiping with ethanol 70% impregnated wipes; daily monitoring by contact plate	 disinfection forgotten; contamination by materials used during preparation 	5 3	3 :	3	45	disinfection at the beginning of a working day is registered in a log	contamination by materials used during preparation still excists	5	3	2	
С	Wall and ceiling SC	daily surface disinfection by wiping with ethanol 70% impregnated wipes	1. disinfection forgotten	5	1	2	10	disinfection at the beginning of a working day is registered in a log	unlikely	5	1	1	
D1	Materials with a sterile surface (sterile devices and infusion bags)	unwrapping in front of SC	1. contaminated outer layer	5 4	4 2	2	40	all operators in background area wear disposable gloves; original boxes are unpacked in front of lock with gloved hands; materials are used directly and/or stored in closed cupboards	transfer and storage is not audited			2	
B Worktop C Wall and D1 Materials surface (and infus D2 Critical s tips, need opening E1 Materials equipme sterile su (ampould bottles) E2 Critical sp stoppers necks) F Operator			2. parts of outer layer inside SC	5	3 2	2	30	aseptic transfer is regularly audited and both operators correct each other	no aseptic transfer into SC by presentation	5	2	1	
D2	Critical spots (syringe tips, needles and the opening of tubes)		1. contact of critical spots with the work top of SC	5 4	4 :	3	60	putting down syringes, needles and open tubes on a sterile pad in SC; use of sterile pad is regularly audited; both operators correct each other	unlikely	5	1	1	
E1	Materials and equipment with a non- sterile surface	disinfection by wiping with ethanol 70% impregnated wipes	1. high surface bioburden before disinfection	5 3	3 :	3	45	ampoules and vials are transferred in their original boxes into the background area; materials are used directly and/or stored in closed cupboards	no periodical surface bioburden determination before disinfection; transfer and storage is not audited	5	1	3	
	(ampoules, vials, bottles)		2. disinfection improperly done	5 4			80	thorough wiping by completely impregnated wipes; disinfection is regularly audited and both operators correct each other	no validated disinfection procedure; no regular surface monitoring of disinfected materials			3	
			 recontamination of disinfected materials 	5 4	4 2	2	40	measures to prevent recontamination; measures to prevent changing disinfected and non-disinfected materials; measures are regularly audited and both operators correct each other	unlikely	5	1	1	
E2	stoppers and ampoule	additional disinfection in SC by wiping with sterile ethanol 70%	1. additional disinfection improperly done	5 3	3 4	4	60	precisely described and improved additinal disinfection technique; additional disinfection is regularly audited; both operators correct each other	still no assurance of a sterile surface	5	1	2	
F	Operator's hands	sterile gloves, which are changed at least every hour; daily glove print by settle plate	1. glove damage	5	3 3	3	45	gloves integrity is tested immediately after putting them on and during processing; glove handling is regularly audited; both operators correct each other	unlikely	5	1	1	
			2. surface contamination during putting on gloves	5	3 :	3	45	no	surface contamination during putting on gloves	5	3	3	
			3. surface contamination during preparation	5 4	4 2	2	40	no	surface contamination during preparation	5	4	2	
G	Operator's forearm	wearing cleanroom clothing which is changed every day	1. surface contamination of the worktop	5	3 2	2	30	operator wears sterile sleeves which are changed after every session	unlikely	5	1	1	
Н	Working procedure	working with two operators during processing; SOPs; operators trained in aseptic techniques; aseptic process	1. deviation from SOPs	5 3			45	accurate and up to date SOPs (enough details, univocal text); working according to SOPs is regularly audited; both operators correct each other				1	
		simulation with a broth solution	2. touching critical spots	5 4			80	additional training in non-touch working; non-touch working is regularly audited; both operators correct each other	chance of touch still excists			2	
			3. SC (downflow), blocking first air at critical spots	5	3		45 780	prevention of blocking first air is regularly audited; both operators correct each other	chance of blocking first air still excists	5	2	1	2

HP 3, Hospital pharmacy 3; S, severity; O, occurrence; D, detection; RPN, Risk Prioritization Number. 780, cumulative RPN after the initial audit; 290, cumulative RPN after the final assessment.

		Supplemental material	placed on this supplemental materia	al whie	ch has	been su	upplied by	the author(s)	Eur J Hosp Pharm
Hosp	ital pharmacy 4	risk as	ssessment after initial audit					results after	final assessmer
	sources of risk	risk reduction	remaining risk after first audit	s	0	D	R P N 1	additional risk reduction	remaining risk
A	Air	SC checked once a year by particle measurements, airflow velocity and HEPA filter integrity in at rest condition; daily monitoring by settle plate	 chance of environment around work zone at rest not in accordance with Grade A air materials and equipment disturb the unidirectional airflow and can block first air at critical spots 		1 2			continuous particle counting near to work zone	unlikely materials and equip unidirectional airflov air at critical spots
В	Worktop SC	disinfection before each work session by wiping with ethanol 70% impregnated wipes	1. no daily monitoring by contact plates; disinfection forgotten; contamination by materials used during preparation	5	3	4	60	daily monitoring by contact plates; disinfection at the beginning of a working day is registered in a log; disinfection before each new prepared dosage form is regularly audited	
С	Wall and ceiling SC	daily surface disinfection by wiping with ethanol 70% impregnated wipes	1. disinfection forgotten	5	1	2	10	disinfection at the beginning of a working day is registered in a log	unlikely
D1	Materials with a sterile surface (sterile devices and infusion bags)	unwrapping in front of SC; all operators in background area wear disposable gloves	1. contaminated outer layer	5	3	2	30	original boxes are unpacked in front of lock with gloved hands; materials are used directly and/or stored in closed cupboards	transfer and storage
			2. parts of outer layer inside SC	5	3	2	30	aseptic transfer is regularly audited and both operators correct each other	no aseptic transfer i presentation
D2	Critical spots (syringe tips, needles and the opening of tubes)		1. contact of critical spots with the work top of SC	5	4	3	60	no	contact of critical sp of SC
E1	Materials and equipment with a non-	disinfection by spraying with ethanol 70%	1. high surface bioburden before disinfection			3		no	high surface bioburd disinfection
	sterile surface (ampoules, vials, bottles)		 spraying is an inadequate disinfection technique; disinfection improperly done 	5	5	4	100	disinfection by wiping; thorough wiping by completely impregnated wipes; disinfection is regularly audited and both operators correct each other	no validated disinfed regular surface mon materials
			3. recontamination of disinfected materials	5	4	2	40	measures to prevent recontamination; measures to prevent changing disinfected and non-disinfected materials; measures are regularly audited and both operators correct each other	unlikely
E2	Critical spots (vial stoppers and ampoule necks)	additional disinfection of vial stopper in SC by wiping with sterile ethanol 70%	 no additional disinfection of ampoule necks; additional disinfection improperly done 	5	4	4	80	additional disinfection of ampoule necks	additional disinfectio
F	Operator's hands	sterile gloves, which are changed at	1. glove damage	5				hands of operator in SC are double gloved	unlikely
		least every hour; daily glove print by settle plate	2. surface contamination during putting on gloves	5	3	3	45	no	surface contamination
			3. surface contamination during preparation	5	4	2	40	glove disinfection before start of each new preparation and every 15 min during a long preparation; glove disinfection is regularly audited	unlikely

1. surface contamination of the worktop

3. SC (downflow), blocking first air at critical

I. deviation from SOPs

HP 4, Hospital pharmacy 4; S, severity; O, occurrence; D, detection; RPN, Risk Prioritization Number. 825, cumulative RPN after the initial audit; 365, cumulative RPN after the final assessment.

5 3 2

5 3 3

5 4 4

5 3 3

30

825

Н

G Operator's forearm

Working procedure

wearing cleanroom clothing which is

working with two operators during

simulation with a broth solution

processing; SOPs; operators trained

in aseptic techniques; aseptic process 2. touching critical spots

spots

changed every day

results after	final assessment				
additional risk reduction	remaining risk	s	0	D	R P N 2
continuous particle counting near to work zone	unlikely	5	1	1	5
no	materials and equipment disturb the unidirectional airflow and can block first air at critical spots	5	2	3	30
daily monitoring by contact plates; disinfection at the beginning of a working day is registered in a log; disinfection before each new prepared dosage form is regularly audited	unlikely	5	1	1	5
disinfection at the beginning of a working day is registered in a log	unlikely	5	1	1	5
original boxes are unpacked in front of lock with gloved hands; materials are used directly and/or stored in closed cupboards	transfer and storage is not audited	5	1	2	10
aseptic transfer is regularly audited and both operators correct each other	no aseptic transfer into SC by presentation	5	2	1	10
no	contact of critical spots with the work top of SC	5	4	3	60
no	high surface bioburden before disinfection	5	3	3	45
disinfection by wiping; thorough wiping by completely impregnated wipes; disinfection is regularly audited and both operators correct each other	no validated disinfection procedure; no regular surface monitoring of disinfected materials	5	2	3	30
measures to prevent recontamination; measures to prevent changing disinfected and non-disinfected materials; measures are regularly audited and both operators correct each other	unlikely	5	1	1	5
additional disinfection of ampoule necks	additional disinfection improperly done	5	3	4	60
hands of operator in SC are double gloved	unlikely	5	1	1	5
no	surface contamination during putting on gloves	5	3	3	45
glove disinfection before start of each new preparation and every 15 min during a long preparation; glove disinfection is regularly audited and both operators correct each other	unlikely	5	1	1	5
operator wears sterile sleeves which are changed after every session	unlikely	5	1	1	5
working according to SOPs is regularly audited; both	SOPs can be improved (more details, in	5	2	1	10
operators correct each other additional training in non-touch working; operators are regularly audited; both operators correct each other	particular of critical activities) chance of touch still exists	5	2	2	20
prevention of blocking first air is regularly audited; both operators correct each other	chance of blocking first air still exists	5	2	1	10
	•				365

lospi	ital pharmacy 5	risk asses	sment after initial audit					results after final assessment							
	sources of risk				0		R P N 1	additional risk reduction	remaining risk	s	0	D	R P N		
A	Air	HEPA filter integrity in at rest condition; daily air sampling by settle plate	 chance of environment around work zone at rest not in accordance with <u>Grade A air</u> materials and equipment disturb the unidirectional airflow and can block first air at critical spots 		1 2	2 3		no	chance of environment around work zone at rest not in accordance with <u>Grade A air</u> materials and equipment disturb the unidirectional airflow and can block first air at critical spots		1	2	3		
В	Worktop SC	disinfection before each work session by wiping with ethanol 70%	1. no daily monitoring by contact plates; disinfection forgotten; contamination by materials used during preparation	5	3	4	60	daily monitoring by contact plates; disinfection at the beginning of a working day is registered in a log; disinfection before each new prepared dosage form is regularly audited	unlikely	5	1	1	5		
С	Wall and ceiling SC	daily surface disinfection by wiping with ethanol 70% impregnated wipes	1. disinfection forgotten	5	1	2	10		unlikely	5	1	1	5		
A Air B Wor C Wall D1 Mate surf: and D2 Criti tips, OD2 E1 Mate equi steri (amp bott Steri (amp bott F Ope	Materials with a sterile surface (sterile devices and infusion bags)	unwrapping in front of SC	1. contaminated outer layer	5	4	2	40	all operators in background area and anteroom wear disposable gloves; materials are used directly and/or store in closed cupboards	of lock with gloved hands; transfer and storage is not audited	5	2	2	20		
			2. parts of outer layer inside SC	5	3	2	30	aseptic transfer into SC by presentation; aseptic transfer is regularly audited and both operators correct each other	unlikely	5	1	1	5		
D2	Critical spots (syringe tips, needles and the opening of tubes)		1. contact of critical spots with the work top of SC	5	4	3	60		contact of critical spots with the work top of SC	5	4	3	6		
	Materials and		disinfection		3			ampoules and vials are transferred into the anteroom in their original boxes; materials are used directly and/or stored in closed cupboards	no periodical surface bioburden determination before disinfection; transfer and storage is not audited			3			
	(ampoules, vials, bottles)		2. disinfection improperly done	5	4	4	80	thorough wiping by a validated disinfection procedure (two towel technique [15]); disinfection is regularly audited and both operators correct each other	no regular surface monitoring of disinfected materials	5	1	3	15		
			3. recontamination of disinfected materials	5	4	2	40	measures to prevent recontamination; measures are regularly audited and both operators correct each other	risk of changing disinfected and non- disinfected materials	5	2	1	1(
E2	Critical spots (vial stoppers and ampoule necks)		1. additional disinfection improperly done	5	3	4	60	precisely described and improved additinal disinfection technique; additional disinfection is regularly audited; both operators correct each other	still no assurance of a sterile surface			2			
F	Operator's hands		1. glove damage		3				glove damage	5	3	3	45		
		h stills shalls	2. surface contamination during putting on gloves					good putting on technique; putting on technique is regularly audited; both operators correct each other	unlikely			1			
			3. surface contamination during preparation		4			and every 15 min during a long preparation; glove disinfection is regularly audited and both operators	unlikely			1			
G	Operator's forearm	changed every day	1. surface contamination of the worktop					every session	unlikely			1			
Η		working with two operators during processing; SOPs; operators trained in aseptic techniques; aseptic process	1. deviation from SOPs		3			text); working according to SOPs is regularly audited; both operators correct each other	unlikely			1			
			2. touching critical spots		4			additional training in non-touch working; non-touch working is regularly audited; both operators correct each other	still a chance of touch				20		
			3. SC (downflow), blocking first air at critical spots	5	3	3	45 795	operators correct each other	still a chance of blocking first air	5	2	1	10 28		

HP 5, Hospital pharmacy 5; S, severity; O, occurrence; D, detection; RPN, Risk Prioritization Number. 795, cumulative RPN after the initial audit; 280, cumulative RPN after the final assessment.

losp	ital pharmacy 6	risk asse	ssment after initial audit					results a	fter final assessment				
AAirAAirBWorktopCWall andD1Materials surface (s and infusD2Critical sp tips, need opening ofD2Critical sp sterile su (ampoule bottles)E2Critical sp stoppers a necks)	sources of risk	risk reduction	remaining risk after first audit	so	D	R P N		onal risk reduction	remaining risk	s	0		R P N
	Air	LAF checked once a year by particle measurements, airflow velocity and HEPA filter integrity in at rest condition; daily air	1. chance of environment around work zone at rest not in accordance with Grade A air	5 1	2	1	0 no		chance of environment around work zone at rest not in accordance with Grade A air	5		2	
A Air A Air B Worktop LAF C Wall and ceiling LA D1 Materials with a ste surface (sterile deviand infusion bags) D2 Critical spots (syrin tips, needles and the opening of tubes) E1 Materials and equipment with a materials and equipment with a materials and equipment with a material surface (ampoules, vials, bottles) E2 Critical spots (vial stoppers and ampour necks) F Operator's hands		sampling by settle plate	 materials and equipment disturb the unidirectional airflow and can block first air at critical spots 				30 no		materials and equipment disturb the unidirectional airflow and can block first air at critical spots	5	2	3	
В	Worktop LAF	disinfection before each work session by wiping with ethanol 70% impregnated wipes; daily monitoring by contact plate	 disinfection forgotten; contamination by materials used during preparation 	5 3	3 3	4	registe prepar	ection at the beginning of a working day is ered in a log; disinfection before each new ared dosage form	disinfection before each new prepared dosage form is not audited	5	2	2	
С	Wall and ceiling LAF	daily surface disinfection by wiping with ethanol 70% impregnated wipes	1. disinfection forgotten		2		registe	ection at the beginning of a working day is tered in a log	unlikely	5		1	
D1	Materials with a sterile surface (sterile devices and infusion bags)	unwrapping partly in front of LAF	1. contaminated outer layer	5 4	1 2	4	gloves lock w	erators in background area wear disposable s; original boxes are unpacked in front of with gloved hands; materials are used tly and/or stored in closed cupboards	transfer and storage is not audited	5	1	2	
			 no second operator during processing; parts of outer layer inside LAF 	5 4	1 2	4	0 all mat	aterials are unwrapped in front of LAF	no transfer into LAF by presentation; aseptic transfer is not audited and operators don't correct each other	5	3	2	
D2	Critical spots (syringe tips, needles and the opening of tubes)		1. contact of critical spots with the work top of LAF	5 4	1 3	6			use of a sterile pad is not audited; operators don't correct each other	5	2	3	
E1	Materials and equipment with a non- sterile surface	disinfection by wiping with ethanol 70% impregnated wipes	1. high surface bioburden before disinfection	5 3	3 3	4	with gl the loc in clos	gloved hands, materials are put directly into ock, materials are used directly and/or stored sed cupboards	no periodical surface bioburden determination before disinfection; transfer and storage is not audited	5	1	3	
			2. disinfection improperly done	5 4	4	8		ugh wiping by a validated disinfection edure (two towel technique [15])	no regular surface monitoring of disinfected materials; disinfection procedure is not audited and operators don't correct each other	5	2	4	
			3. recontamination of disinfected materials	5 4	2	4	to prev	ures to prevent recontamination; measures event changing disinfected and non- ected materials	measures to prevent recontamination and changing are not audited; operators don't correct each other	5	2	2	
E2	stoppers and ampoule	additional disinfection in LAF by wiping with ethanol 70%	1. no use of a sterile disinfectant; additional disinfection improperly done	5 4	4	8		f a sterile disinfectant; precisely described mproved additinal disinfection technique	additional disinfection is not audited; operators don't correct each other	5	2	4	
F	Operator's hands	sterile gloves, daily glove print by settle plate	1. gloves are not changed regularly; glove damage		13		-		no check of glove integrity; glove handling is not audited; operators don't correct each other		3		
			2. surface contamination during putting on gloves	5 3			· ·		putting on gloves is not audited; operators don't correct each other				
			3. gloves are not changed regularly; surface contamination during preparation	5 5	5 2	5	i0 new gl	gloves before each new preparation	no glove disinfection every 15 min during a long preparation; glove disinfection is not regularly audited and both operators don't correct each	g 5	3	2	
G	Operator's forearm	wearing cleanroom clothing which is changed every day	1. surface contamination of the worktop				30 no		surface contamination of the worktop		3		
Η	Working procedure	techniques; aseptic process simulation	deviation from SOPs; no second operator during processing	5 3			univoc	ate and up to date SOPs (enough details, cal text)	working according to SOPs is not audited; operators don't correct each other		2		
			touching critical spots; no second operator during processing LAF (crossflow), blocking first air at critical	5 4			additio		non-touch working is not audited; operators don't correct each other LAF (crossflow), blocking first air at critical		3		
			spots; no second operator during processing	5 2		3			spots	5	2	З	

HP 6, Hospital pharmacy 6; S, severity; O, occurrence; D, detection; RPN, Risk Prioritization Number. 820, cumulative RPN after the initial audit; 505, cumulative RPN after the final assessment.

Supplemental material	Supplementa	al material
-----------------------	-------------	-------------

Hospital pharmacy 7

	sources of risk	risk reduction	remaining risk after first audit	s	0	D	R P N 1	additional risk reduction	remaining risk
A	Air	SC checked once a year by particle measurements, airflow velocity and HEPA filter integrity in at rest condition; daily air	1. chance of environment around work zone at rest not in accordance with Grade A air		1		10		chance of environment ar zone at rest not in accord Grade A air
		sampling by settle plate	 materials and equipment disturb the unidirectional airflow and can block first air at critical spots 		2			no	materials and equipment unidirectional airflow and first air at critical spots
В	Worktop SC	disinfection before each work session by wiping with ethanol 70% impregnated wipes; weekly monitoring by contact plate	 no daily monitoring by contact plates; disinfection forgotten; contamination by materials used during preparation 	5	3	4	60	disinfection at the beginning of a working day is registered in a log	daily glove print by settle contamination by material during preparation still exi
С	Wall and ceiling SC	daily surface disinfection by wiping with ethanol 70% impregnated wipes	1. disinfection forgotten	5	1	2	10	disinfection at the beginning of a working day is registered in a log	unlikely
	Materials with a sterile	unwrapping in front of SC	1. contaminated outer layer		4	2		no	contaminated outer layer
	surface (sterile devices and infusion bags)		2. parts of outer layer inside SC		3	2	30	no	parts of outer layer inside
	Critical spots (syringe tips, needles and the opening of tubes)		1. contact of critical spots with the work top of SC	5	4	3	60	no	contact of critical spots w top of SC
E1	Materials and equipment with a non-	disinfection by wiping with ethanol 70% impregnated wipes	1. high surface bioburden before disinfection		3	3	45	no	high surface bioburden be disinfection
	sterile surface		2. disinfection improperly done		4	4	80	no	disinfection improperly do
	(ampoules, vials, bottles)		3. recontamination of disinfected materials	5		2	40	no	recontamination of disinfe materials
E2	Critical spots (vial stoppers and ampoule necks)	additional disinfection in SC by wiping with sterile ethanol 70%	1. additional disinfection improperly done	5	3	4	60	no	additional disinfection imp
F	Operator's hands	sterile gloves, which are changed at least	1. glove damage				45	no	glove damage
		every hour; daily glove print by settle plate	2. surface contamination during putting on gloves		3	3	45	no	surface contamination du on gloves
			3. surface contamination during preparation		4	2		no	surface contamination du preparation
G	Operator's forearm	wearing cleanroom clothing which is changed every day	1. surface contamination of the worktop	5	2	3	30	operator wears a sterile overcoat, which is changed after every session	unlikely
Н	Working procedure	working with two operators during	1. deviation from SOPs	5	3	3	45	no	deviation from SOPs
		processing; SOPs; operators trained in	2. touching critical spots	5		4	80	no	touching critical spots
		aseptic techniques; aseptic process simulation with a broth solution	 SC (downflow), blocking first air at critical spots 	5	3	3	45	no	blocking first air at critical

risk assessment after initial audit

HP 7, Hospital pharmacy 7; S, severity; O, occurrence; D, detection; RPN, Risk Prioritization Number. 795, cumulative RPN after the initial audit; 725, cumulative RPN after the final assessment.

results	after final assessment				
	remaining risk	S	0	D	R P N 2
	chance of environment around work zone at rest not in accordance with Grade A air	5	1	2	10
	materials and equipment disturb the unidirectional airflow and can block first air at critical spots	5	2	3	30
ng of a in a log	daily glove print by settle plate; contamination by materials used during preparation still exists	5	3	3	45
ng of a in a log	unlikely	5	1	1	5
	contaminated outer layer	5	4	2	40
	parts of outer layer inside SC	5	3	2	30
	contact of critical spots with the work top of SC	5	4	3	60
	high surface bioburden before disinfection	5	3	3	45
	disinfection improperly done	5	4	4	80
	recontamination of disinfected materials	5	4	2	40
	additional disinfection improperly done	5	3	4	60
	glove damage	5	2	3	30
	surface contamination during putting on gloves	5	2	3	30
	surface contamination during preparation	5	3	3	45
vercoat, ery	unlikely	5	1	1	5
	deviation from SOPs	5	3	3	45
	touching critical spots	5	4	4	80
	blocking first air at critical spots	5	3	3	45
		-			

ospi	ital pharmacy 8	risk assessm	ent after initial audit					results after fina	l assessment			
	sources of risk	risk reduction	remaining risk after first audit	S	0	D	R P N 1	additional risk reduction	remaining risk	s	0	D
A	Air	integrity in at rest condition; daily air sampling by	1. chance of environment around work zone at rest not in accordance with Grade A air			2			chance of environment around work zone at rest not in accordance with Grade A air			2
			2. materials and equipment disturb the unidirectional airflow and can block first air at critical spots	5	2	3	30	correct position of materials after investigations by airflow visualization in worst case situation; position of materials is regularly audited and both operators correct each other	unlikely	5	1	1
В	Worktop LAF		 no daily monitoring by contact plates; contamination by materials used during preparation 	5	3	3	45	disinfection before each new prepared dosage form; disinfection before each new prepared dosage form is regularly audited	no daily monitoring by contact plates	5	1	2
С	Wall and ceiling LAF	daily surface disinfection by wiping with ethanol 70% impregnated wipes; disinfection at the beginning of a working day is registered in a log	unlikely	5	1	1	5	no	unlikely	5	1	1
	Materials with a sterile surface (sterile devices and infusion bags)	unwrapping in front of LAF	1. contaminated outer layer	5	4	2	40	all operators in background area and anteroom wear disposable gloves; original boxes are unpacked in front of lock with gloved hands; materials are used directly and/or stored in closed cupboards	transfer and storage is not audited	5	1	2
			2. no second operator during processing; parts of outer layer inside LAF	5	3	2	30	no	no second operator during processing; parts of outer layer inside LAF		3	2
	Critical spots (syringe tips, needles and the opening of tubes)		1. contact of critical spots with the work top of LAF	5	4	3	60	no	contact of critical spots with the work top of LAF	5	4	3
E1	Materials and equipment with a non- sterile surface	process of disinfected materials into background	1. high surface bioburden before disinfection			3	45	ampoules and vials are transferred into the anteroom in their original boxes; materials are used directly and/or stored in closed cupboards	no periodical surface bioburden determination before disinfection; transfer and storage is not audited	5		
	(ampoules, vials, bottles)	measures to prevent changing disinfected and non-disinfected materials	2. disinfection improperly done			4	80	Thorough wiping by completely impregnated wipes; regular surface monitoring of disinfected materials; disinfection is regularly audited	no validated disinfection procedure		2	1
			3. measures to prevent recontamination and changing are not audited			2	20	measures are regularly audited and both operators correct each other	unlikely	5		1
	Critical spots (vial stoppers and ampoule necks)	additional disinfection in LAF by wiping with sterile ethanol 70%	 no additional disinfection of ampoule necks; additional disinfection improperly done 	5	4	4	80	additional disinfection of ampoule necks; precisely described and improved additinal disinfection technique; additional disinfection is regularly audited	still no assurance of a sterile surface; no second operator during processing	5	1	3
F	Operator's hands	sterile gloves, which are changed at least every hour; daily glove print by settle plate	1. glove damage			3		gloves integrity is tested immediately after putting them on and during processing; glove handling is regularly audited	no second operator during processing; parts of outer layer inside LAF			
			2. surface contamination during putting on gloves			3		good putting on technique; putting on technique is regularly audited	no second operator during processing; parts of outer layer inside			
			3. surface contamination during preparation			2		glove disinfection before start of each new preparation and every 15 min during a long preparation; glove disinfection is regularly audited		5		
	Operator's forearm	wearing cleanroom clothing which is changed every day	1. surface contamination of the worktop				30		surface contamination of the worktop			
Ŧ	Working procedure		1. deviation from SOPs; no second operator during processing			3 4		accurate and up to date SOPs (enough details, univocal text); working according to SOPs is regularly audited	no second operator during processing	5		
			 touching critical spots; no second operator during processing LAF (crossflow), blocking first air at critical spots; no second operator during 				80 30	additional training in non-touch working; non-touch working is regularly audited prevention of blocking first air is regularly audited	still a chance of touch; no second operator during processing no second operator during processing	5 5	2	


HP 8, Hospital pharmacy 8; S, severity; O, occurrence; D, detection; RPN, Risk Prioritization Number. 760, cumulative RPN after the initial audit; 280, cumulative RPN after the final assessment.

A Air A Air B Wo C Wa D1 Ma sun infi D2 Cri net tub E1 Ma wit (an F Op	ital pharmacy 9	risk assessment	after initial audit					results after fi	nal assessment			
	sources of risk	risk reduction	remaining risk after first audit	s	0		R P N 1	ditional risk reduction	remaining risk	s	0	D
A	Air	LAF checked once a year by particle measurements, airflow velocity and HEPA filter integrity in at rest condition; daily air sampling by settle plate	1. chance of environment around work zone at rest not in accordance with Grade A air	5	1 2	2	10 no)	chance of environment around work zone at rest not in accordance with Grade A air	5	1	2
			2. materials and equipment disturb the unidirectional airflow and can block first air at critical spots	5	2 3	3	air	prrect position of materials after investigations by rflow visualization in worst case situation; position materials is regularly audited	unlikely	5	1	1
В	Worktop LAF	disinfection before each work session by wiping with isopropyl alcohol 70% impregnated wipes; daily monitoring by contact plate; disinfection at the beginning of a working day is registered in a log	1. contamination by materials used during preparation	5	3 2	2	dis	sinfection before each new prepared dosage form; sinfection before each new prepared dosage form regularly audited	unlikely	5	1	1
С	Wall and ceiling LAF	daily surface disinfection by wiping with isopropyl alcohol 70% impregnated wipes; disinfection at the beginning of a working day is registered in a log	unlikely	5	1 1		5 no)	unlikely	5	1	1
D1	Materials with a sterile	unwrapping in front of LAF; all operators in	1. contaminated outer layer	5	2 2	2	20 nc)	contaminated outer layer	5	2	2
		background area wear disposable gloves; materials are used directly and/or store in closed cupboards; aseptic transfer is regularly audited	2. no second operator during processing; parts of outer layer inside LAF	5	3 2	2	30 no		no second operator during processing; parts of outer layer inside LAF	5	3	2
D2	Critical spots (syringe tips, needles and the opening of tubes)		1. contact of critical spots with the work top of LAF	5	4 3	3	ste	utting down syringes, needles and open tubes on a erile pad in LAF; use of sterile pad is regularly udited	no second operator during processing	5	1	2
E1	Materials and equipment with a non-sterile surface	disinfection by wiping with isopropyl ethanol 70% impregnated wipes; disinfection is regularly audited;	1. high surface bioburden before disinfection		3 3		45 no)	high surface bioburden before disinfection		3	
	(ampoules, vials, bottles)	measures to prevent changing disinfected and non- disinfected materials which are audited regularly	2. disinfection improperly done	5	4 4	ŀ	(tv of	orough wiping by a validated disinfection procedure wo towel technique [15]); regular surface monitoring disinfected materials; disinfection is regularly udited	unlikely	5	1	1
			3. recontamination of disinfected materials		3 2		re	easures to prevent recontamination; measures are gularly audited	unlikely	5		
E2		additional disinfection in LAF by wiping with sterile ethanol 70%; additional disinfection is regularly audited	1. additional disinfection can be improved	5	2 3	3		ecisely described and improved additinal sinfection technique	still no assurance of a sterile surface; no second operator during processing	5	1	3
F	Operator's hands	sterile gloves, which are changed at least every hour; daily glove print by settle plate	1. glove damage	5	3 3	3	the	oves integrity is tested immediately after putting em on and during processing; glove handling is gularly audited	no second operator during processing	5	1	2
			2. surface contamination during putting on gloves		3 3		re	gularly audited	no second operator during processing		1	
			 surface contamination during preparation 	5	4 2	2	pr	ove disinfection before start of each new eparation and and every 15 min during a long eparation; glove disinfection is regularly audited	unlikely	5	1	1
G	Operator's forearm	waring cleanroom clothing which is changed every day	1. surface contamination of the worktop		3 2		aft	berator wears sterile sleeves which are changed ter every session	unlikely		1	
Η	Working procedure	SOPs; operators trained in aseptic techniques; aseptic process simulation with a broth solution; non- touch working and prevention of blocking first air are	1. deviation from SOPs; no second operator during processing		3 3		un au	ccurate and up to date SOPs (enough details, nivocal text); working according to SOPs is regularly udited			1	
		regularly audited	2. touching critical spots; no second operator during processing		3 3			ditional training in non-touch working	still a chance of touch; no second operator during processing	5		
			3. LAF (crossflow), blocking first air at critical spots; no second operator during processing	5	1 2	2	10 no		no second operator during processing	5	1	2

HP 9, Hospital pharmacy 9; S, severity; O, occurrence; D, detection; RPN, Risk Prioritization Number. 630, cumulative RPN after the initial audit; 235, cumulative RPN after the final assessment.

SUPPLEMENTARY FILE 5

Sterile holder for syringes and needles, which can be used inside LAF/SC instead of a sterile pad

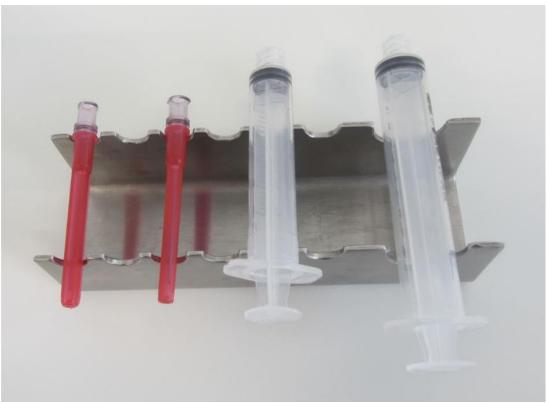

Supplementary file 6

'Blank' RA & RC template for determining RPN values and remaining risk, after assessing aseptic handling by using the checklist of supplementary file 2

							Γ	results after	assessing aseptic handling				
	sources of risk	general applied risk reduction	remaining risk after general applied risk reduction	s	0			additional risk reduction according to checklist II (see online supplementary file 2), used during the assessment	remaining risk after the assessment	s	0	D	R P N 2
A	Air	LAF/SC checked once a year by particle measurements, airflow velocity and HEPA filter integrity in at rest condition; daily monitoring by	 chance of environment around work zone at rest not in accordance with Grade A air materials and equipment disturb the 		1		10						0
		settle plate	unidirectional airflow and can block first air at critical spots										Ŭ
В		disinfection before each work session by wiping with ethanol or isopropyl alcohol 70% impregnated wipes; daily monitoring by contact plate	1. disinfection forgotten; contamination by materials used during preparation	5	3	3 4	45						0
С	Wall and ceiling LAF/SC	daily surface disinfection by wiping with ethanol or isopropyl alcohol 70% impregnated wipes	1. disinfection forgotten		1		10						0
D1	Materials with a sterile surface (sterile devices and infusion bags)	unwrapping in front of LAF/SC	 contaminated outer layer parts of outer layer inside LAF/SC 		4 3		40 30					7	0
D2	Critical spots (syringe tips, needles and the opening of tubes)		1. contact of critical spots with the work top of LAF/SC	5	4	3 6	50						0
E1	Materials and equipment with	disinfection by wiping with ethanol or isopropyl alcohol 70%	1. high surface bioburden before disinfection 2. disinfection improperly done		3 4		45 30					\neg	0
	(ampoules, vials, bottles)		3. recontamination of disinfected materials		4		40					-	0
E2	Critical spots (vial stoppers and ampoule necks)	additional disinfection in LAF/SC by wiping with sterile ethanol or isopropyl alcohol 70%	1. additional disinfection improperly done	5	3	4 6	60						0
F	Operator's hands	sterile gloves, which are changed at least every	1. glove damage		3		45						0
		hour; daily monitoring by glove print 5 fingers	2. surface contamination during putting on gloves		3		45					_	0
	On anataria fanaama		3. surface contamination during preparation		4 3		40					_	0
G	Operator's forearm	wearing cleanroom clothing which is changed every day	1. surface contamination of the worktop	5	3	2	30						0
Н	Working procedure	working with two operators; SOP; operators	1. deviation from SOPs		3		45						0
		trained in aseptic techniques by broth simulations	2. touching critical spots		4		30					\square	0
		every year; process validation by broth simulation	3a. crossflow: blocking first air at critical spots		2		_						0
			or 3b. downflow: blocking first air at critical spots	5	3	3 4	45						0

765/780

'Blank' RA & RC template for determining RPN values and remaining risk, after assessing aseptic handling by using the checklist of online supplementary file 2.

'General applied risk reduction' corresponds to the measures for each source of risk, listed after the words 'Risk reduction' in the checklist; 'Remaining risk after general applied risk reduction' corresponds to the text for

each source of risk listed below 'Remaining risk' in the checklist. Both are the mean results after the audits in the nine participating hospital pharmacies.

S, severity; O, occurrence; D, detection; RPN, Risk Prioritization Number. 765/780, cumulative RPN 1 if aseptic handling is done in crossflow (3a) or downflow (3b) respectively.

The Excel version of this template is available and can be ordered by the principal investigator (fritsboom70@gmail.com)